


# Automatic Transfer Switch (ATS)



- 16A max. input current
- Powered by two separately independent power sources
- Dual power supply for redundancy
- Provides seamless power switch for IT equipment
- Preferred source selection on front panel
- Highly reliability 19" rack design (1U) to fit into a diverse working environment
- Built-in USB and RS-232 communications

ACCESSORY

## System Configuration:

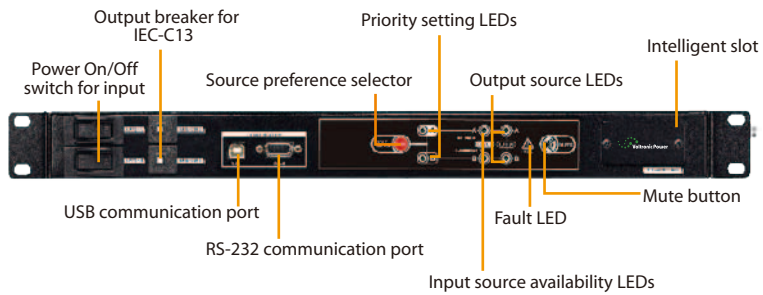

## Automatic Transfer Switch Selection Guide

MODEL	ATS
<b>INPUT</b>	
Input Voltage	220/230/240 VAC
Acceptable Input Voltage	180 - 258 VAC
Input Frequency	50 Hz / 60 Hz
Maximum Input Current	16 A
<b>OUTPUT</b>	
Output Voltage	220/230/240 VAC
Maximum Output Current	10 A for IEC-C13 outlets 16 A for IEC-C19 outlet
<b>CONNECTION</b>	
Input	2 x IEC-C20 inlets
Output	8 x IEC-C13 1 x IEC-C19
Communication	USB/RS-232
Transfer time	9-12ms (Typical)
<b>PHYSICAL</b>	
Dimension, D X W X H (mm)	330 X 483 X 44
Net Weight (kgs)	5
Net Weight (including accessories) (kgs)	8
<b>ENVIRONMENT</b>	
Operating Temperature	20-95 % RH @ -5-45°C (non-condensing)

\* Product specifications are subject to change without further notice