

Fullriver HC Series Batteries

Overview

The Fullriver HC Series battery range features advanced AGM (Absorbent Glass Mat) technology to provide a genuine no-compromise dual-purpose battery.

Now you really can have the best of both worlds – a spill-proof AGM battery which provides even more cranking power than conventional starting batteries (up to 2250 crank amps for 5 seconds @ 25 deg.C) combined with true deep-cycling capability.


High-purity lead AGM construction accepts rapid re-charging, providing more usable power than traditional deep-cycle batteries.

Instantly recognisable by their bright yellow casings, Fullriver HC Series (High-cranking / High-Cycling) can also be ordered with powder coated black metal jacket to further improve impact resistance and durability in off-road applications including four-wheel driving and motorsport.



Benefits

- ✓ Protective steel casing with black powder-coat finish (limited range)
- ✓ Non-spillable AGM – no corrosion
- ✓ Safe for installation in racing cars and motorsports applications
- ✓ Can be mounted in any direction (excluding upside-down)
- ✓ Low-profile sizes for limited space applications
- ✓ Low self-discharge, less than 3% per month at 25C
- ✓ Low resistance design – ideal for both starting and cycling
- ✓ High-rate discharge – high current power delivery
- ✓ Deep-discharge with excellent recovery – rapid recharge acceptance

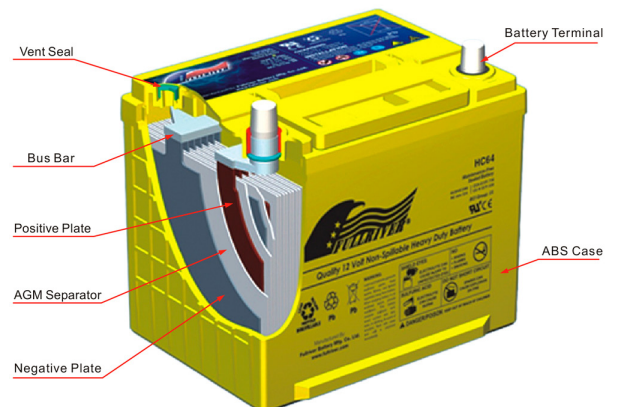

Specifications

Part Number	Voltage	Capacity	L	W	H	H Total	Weight
HGL260-12	12	260 ah	521	269	220	224	72.5
HC8 - (PC310)	12	100	138	86	102	102	3
HC14A - (PC535)	12	200	170	99	157	157	5.2
HC14B - (PC545)	12	185	177	86	131	131	5
HC15 - (Extreme 15)	12	156	200	77	134	138	5.5
HC18 - (PC625)	12	265	170	99	175	175	6.9
HC20 - (PC680)	12	230	181	77	167	167	6.6
HC28 - (PC925)	12	410	165	176	125	125	10.7
HC30 - (Extreme30)	12	450	250	97	142	156	10.6
HC35 - (U1 Size)	12	438	196	131	167	167	12.1
HC40 - (Extreme 40)	12	500	250	97	192	206	8.1
HC44 - (PC1200)	12	560	198	166	170	170	15.1
HC50L/R - (DIN - L2)	12	610	241	175	190	190	19.1
HC55	12	620	229	138	208	212	18
HC60 - (Extreme 60)	12	700	220	121	247	261	20.5
HC60B - (DIN - L3)	12	680	278	175	190	190	21.8
HC64L/R (55D23L/R)	12	750	240	174	202	220	22.3
HC65ST L/R (MF50ZZ/L)	12	825	261	172	183	204	20.9
HC75 - (PC1750)	12	930	300	182	170	188	25.4
HC80 - (DIN - L5)	12	890	353	175	190	190	27.7
HC100 - (MF70ZZ)	12	965	307	169	214	237	32.2
HC105 - (PC2150)	12	1050	330	172	214	220	34
HC110 - (PC2150 stud)	12	1100	330	173	214	237	34.6
HC120 - PC2250)	12	1150	284	268	206	210	38.7
HC14V50	14	570	260	164	179	183	19.1
HC16V50	16	570	260	164	179	183	21.2

Applications




Performance



Extreme Racing



Power Sports

Car Audio
AccessoriesHeavy Duty /
Commercial

Marine