

ATS Data Sheet

Model Number: **ATS-3223C-01C1**



Meter

True RMS Current Meter.

Power Monitor

Total Power Monitoring by Meter, Web, SNMP, Free Bundle Software

Protocols

Http, Https, SNMP, DHCP, UDP, SSL(verified by IE8 on WinXP)

Installed in Rack

Horizontal

Power Action


Automatic Transfer Switch

Event Alert

Email, Trap

Option Device

Temp./Humidity Probe

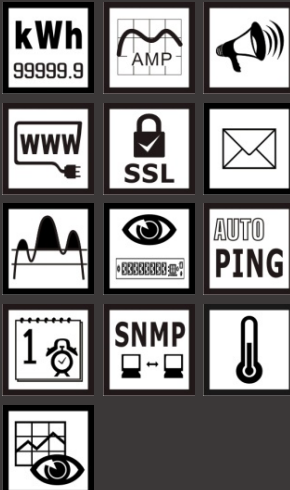

General

Output	(1) IEC 309 32A 2P+E receptacle, 0.9 meters
Input	(2) attached IEC309 32A 2P+E plugs, 3 meters

Communication

SSL Indication	(1) Yellow LED
DHCP Indication	(1) Green LED
Output Status	(2) Green LED
Input Status	(2) Green LED
Network	(1) RJ45 for Ethernet
Temp./Humidity	(1) RJ11 for ENV probe connection
Identification	1 Digits Seven Segments for Identification
Meter	3 Digits Seven Segments

Power Information

Voltage	+/- 2% @ 90V~260V
Active Power	+/- 2% @ 50W~5000W
Apparent Power	+/- 2% @ 50VA~5000VA
Frequency	+/- 2% @ 45~65Hz
Power Factor	+/- 0.02 @ 0.5~1.0
kWh	Range: 0.001kWh ~ 99999.999kWh Precision: +/-2% @ 50W~5000W, kh=1.0
Current	Range: 0A ~ 32 A Resolution: 0.1A Precision: +/-2%+/-0.1AMP

Operation

Nominal Voltage	200V ~240V
On-Line Voltage	180V~ 262V
Frequency	50/60Hz
Max. Output Current	32 Amp
Transfer Time	8~16ms
Operation Temp.	0 ~ 40 Celsius degree
Humidity	0% ~ 90%
Size	260 x 432 x 44.45 mm
Net Weight	7.6 kg
SECAP SERVICES AVAILABLE:	Regulatory Approvals CE, EN 55022 Class A, EN 55024, EN 61000-3-2, EN 61000-3-3 FCC Part 15 Class A, ICES-003

SECAP

SERVICES

AVAILABLE:

Technical Support

Installation and Setup

Maintenance

Application Support

Hardware Support

Guaranteed Warranty



36/7 Sefton Road
Thornleigh, NSW 2120
Phone: 1800 4 SECAP

Email: info@secap.com.au
Web: www.secap.com.au